


HYGROMASTER





HYGROMASTER

This device should be used along with the cellar air conditioner

- Sober, discreet design in a neutral color pallet : grey
- Works easily and features just one operation setting
- Easy to install with just one integrated plug
- Delivered with a 20L water tank that is ready to be linked up (available as an option)
- This device is adapted to a cellar with a maximum volume of 100 cubic meters*.
- 2 year warranty








Stop/start switch

The Hygromaster filling up with water, the lid is shut during this phase.

Power cable

Humidity instructions settings

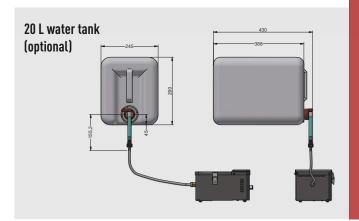

- In winter, activate the HYGROMASTER in humidifying position (I).
- Ensure you check and fill the reservoir's water level regulary (use demineralized water).
- During the summer, cut the humidifier in order not to disturb cold production and generate excessive amounts of condensates.

| REFERENCE | HYGROMASTER |
|-----------------------------------|--------------------------|
| Electrical supply | 230-240 V - 50Hz |
| Intensity used for humidification | 0,2 A |
| Humidification capacity* | 18,2g water/h at 12°C* |
| Dimensions | W.258 x H.140 x D.166 mm |
| Power used for humidification | 45 W |
| Length of the power cable | 3 m |

*With an insulation adapted to the temperature and the volume of the cellar.

WINEMASTER ———— le temps d'être différent

- Z.I. VIEUX-THANN 18 RUE GUY DE PLACE BP 60010 - F68801 THANN CEDEX
- Tél: +33 (0) 389 377 515
- E-mail : contact@winemaster.fr